



One-X Attendant Setting Road Warrior Or Telecommuter Mode

Open the One-X Attendant client and click the **Login** button:

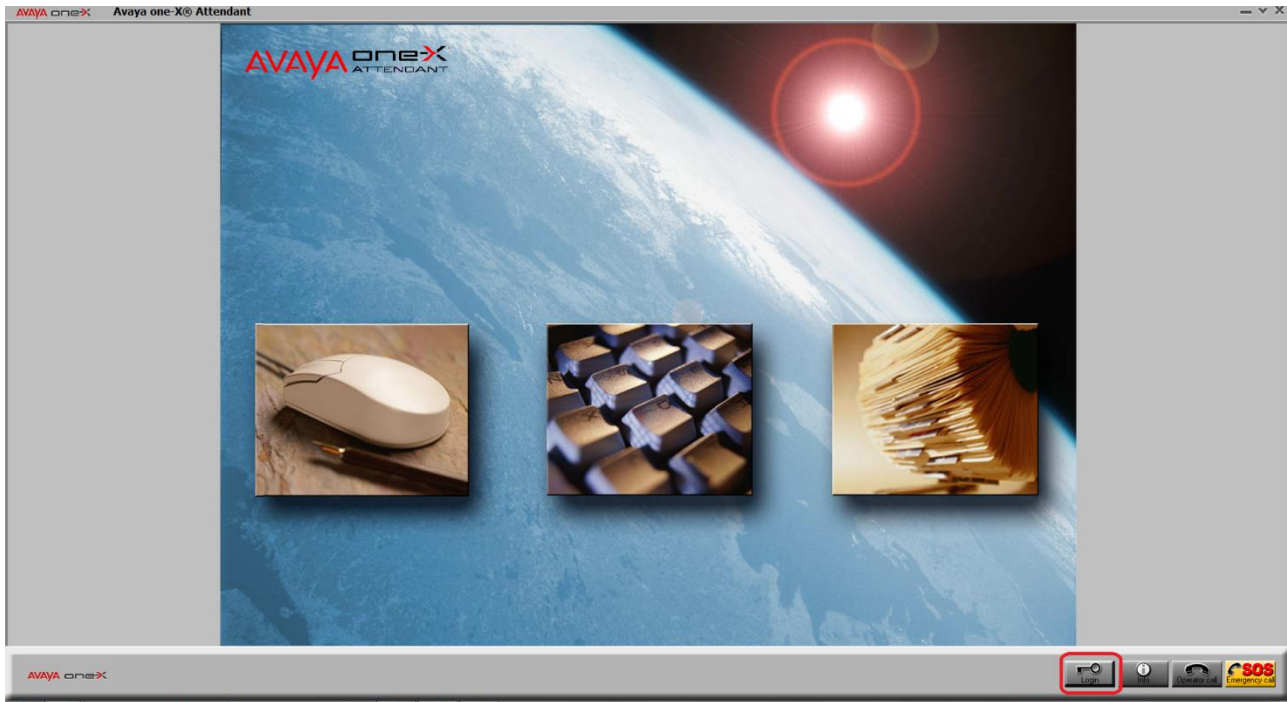

Login with Name: **avaya** and Password: 00000000:

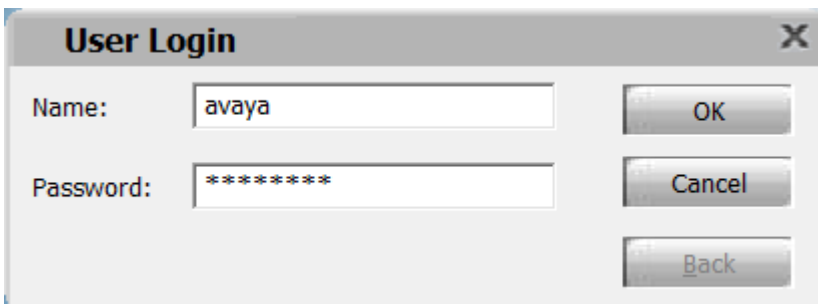


User Login X

Name: OK

Password: Cancel

Back

Click on **System config**:

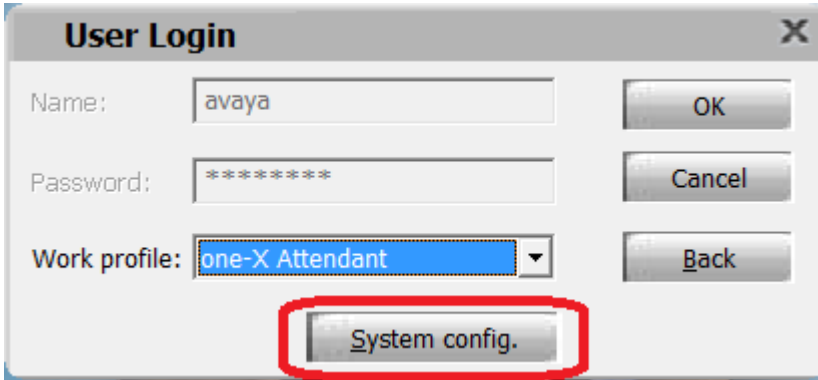

User Login [X]


Name:

Password:

Work profile:

(highlighted with a red box)

Then select the **CommunicationManager** tab, click Logout and then **Login settings**:

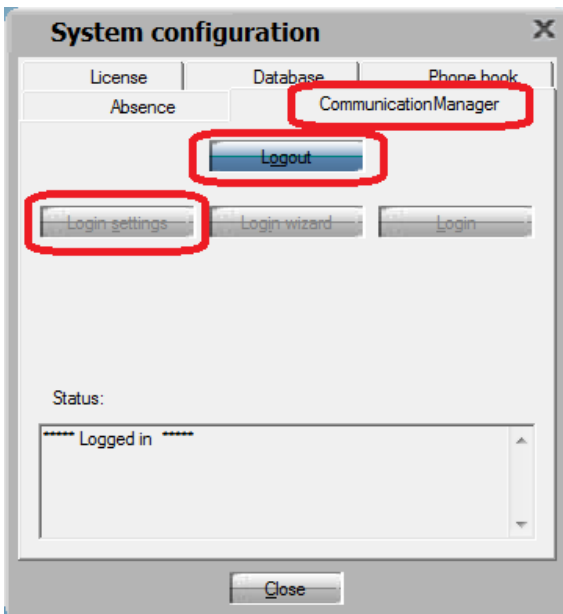

System configuration [X]

License | Database | Phone book

Absence | **CommunicationManager** (highlighted with a red box)


(highlighted with a red box)

(highlighted with a red box) | |

Status:

***** Logged in *****


Select the **Audio** tab, then select **Telecommuter** and then enter the extension number you require the phone to use for audio:

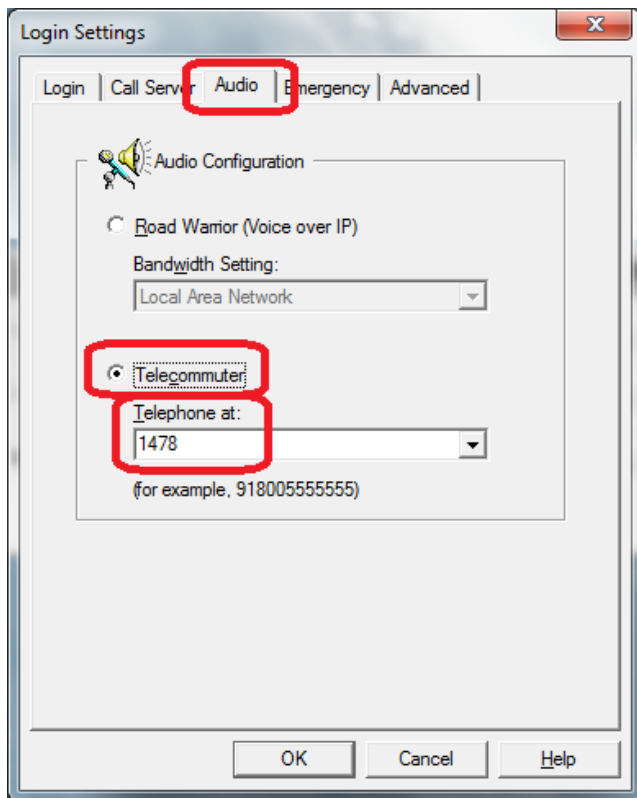

If you require the audio to use a USB headset again then go into the same options as before but change to Road Warrior, with Bandwidth Setting: Local Area Network:

Login Settings

Login | Call Server | **Audio** | Emergency | Advanced

 Audio Configuration

Road Warrior (Voice over IP)

Bandwidth Setting:
Local Area Network

Telecommuter

Telephone at:
1478

(for example, 918005555555)

OK Cancel Help